

## SWIFT UP 3.8 SWIFT UP 4.5



### TINY MACHINE, HIGH PRODUCTIVITY

- > Ultra compact design: fit through single doors, elevators...
- > Narrow turning radius to fit with confined spaces constraint
- > Lightweight to work on sensitive grounds or in multi-story projects

### LOW SIZE, HIGH AGILITY

- > Small platform to work in tiny spaces
- > Heavy tools and material transportable at once: platform capacity up to 240 kg

### LOW MAINTENANCE, EASY TO USE

- > No set up time, just push the machine where you want to use it
- > Maintenance free battery



# SWIFT UP 3.8

# SWIFT UP 4.5


## LOW-LEVEL ACCESS

### TECHNICAL DATA

	SWIFT UP 3.8	SWIFT UP 4.5
Working height	3.8 m	4.5 m
Platform height	1.8 m	2.5 m
Lift capacity	240 kg (1 pers.)	
Platform size	1.04 m x 0.57 m	
<b>A</b> Length	1.2 m	
<b>B</b> Width	0.7 m	
<b>C</b> Height - stowed	1.72 m	1.78 m
<b>D</b> Wheel base	0.9 m	
<b>E</b> Ground clearance	5 cm	
Motion	Push-Around - Manual	
Turning radius - Inside	0 m	
Turning radius - Outside	1.2 m	
Tilt	1.5 °	
Tyres size	150 mm x 48 mm	
Battery	12V DC - AGM	
Weight	270 kg	315 kg

### STANDARD EQUIPMENT

- > Manual horizontal motion (push around)
- > Electrically driven lifting
- > Maintenance free AGM battery
- > Battery charger 10 Ah
- > Battery level indicator on lower control box
- > Battery charge indicator
- > Emergency lowering descent
- > 2 fixed wheels - 2 castor wheels
- > Swing door
- > Mobile upper control box
- > Charger plug with dedicated storage box
- > Tilt indicator on upper control box
- > Hour meter
- > Forklift pockets

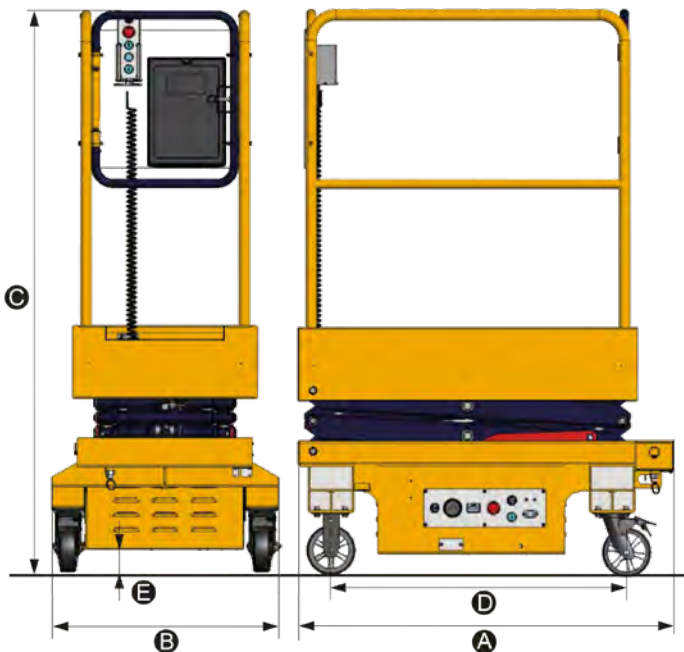

SWIFT UP 3.8 / SWIFT UP 4.5

