




SWIFT UP **4.5 SP** SWIFT UP **5 SP** SWIFT UP **5.9 SP**

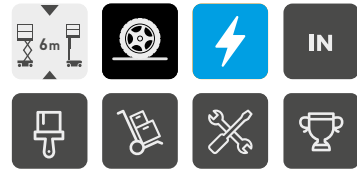

TINY MACHINE, HIGH PRODUCTIVITY

- > Ultra compact design: fit through single doors, elevators...
- > Narrow turning radius to fit with confined spaces constraint
- > Lightweight to work on sensitive grounds or in multi-story projects

LOW SIZE, HIGH AGILITY

- > Small platform to work in tiny spaces
- > Heavy tools and material transportable at once : platform capacity up to 240 kg
- > Self propelled driveable at full height for easy repositioning
- > Access ramps up to 25%

LOW MAINTENANCE, EASY TO USE


- > No set up time, the machine is ready to use
- > Maintenance free battery

SWIFT UP 4.5 SP / SWIFT UP 5 SP / SWIFT UP 5.9 SP

LOW-LEVEL ACCESS

TECHNICAL DATA

	SWIFT UP 4.5 SP	SWIFT UP 5 SP	SWIFT UP 5.9 SP
Working height	4.5 m	5 m	5.9 m
Platform height	2.5 m	3 m	3.9 m
Lift capacity	240 kg (1 pers.)		
Platform size	1.04 m x 0.57 m	1.28 m x 0.65 m	
A Length	1.2 m	1.4 m	
B Width	0.7 m	0.75 m	
C Height - stowed	1.8 m	1.81 m	1.9 m
D Wheel base	0.91 m	1.14 m	
E Ground clearance	5 cm		
Motion	Self-Propelled - Electric		
Turning radius - Inside	0 m		
Turning radius - Outside	0.99 m	1.15 m	
Tilt	1.5 °		
Gradeability	25 %		
Tyres size (front / back)	150mm x 48mm / 230mm x 80mm		
Battery	2x12V DC - AGM		
Weight	398 kg	505 kg	545 kg

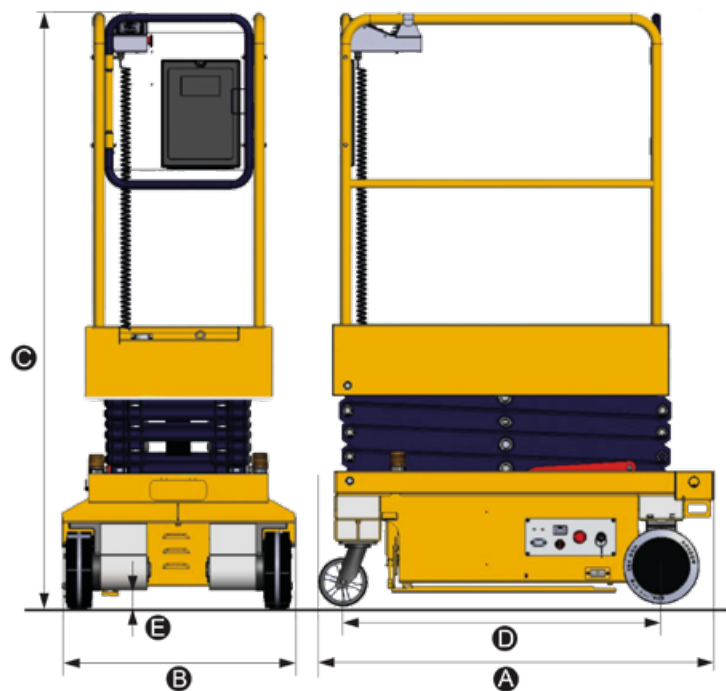

STANDARD EQUIPMENT

- > Electrically driven lifting
- > Electrically driven motion thanks to the 2 drive wheels
- > Maintenance free AGM battery
- > Battery charger > 12 Ah
- > Battery level indicator on upper control box
- > Emergency lowering descent
- > 2 front castor wheels
- > Automatic wheel lock
- > Swing door
- > Mobile upper control box
- > Charger plug with dedicated storage box
- > Motion flashing light
- > Horn
- > Motion alarm
- > Tilt indicator on lower control box
- > Hour meter
- > Forklift pockets

