


ELEVAH® 61



ELEVAH 61

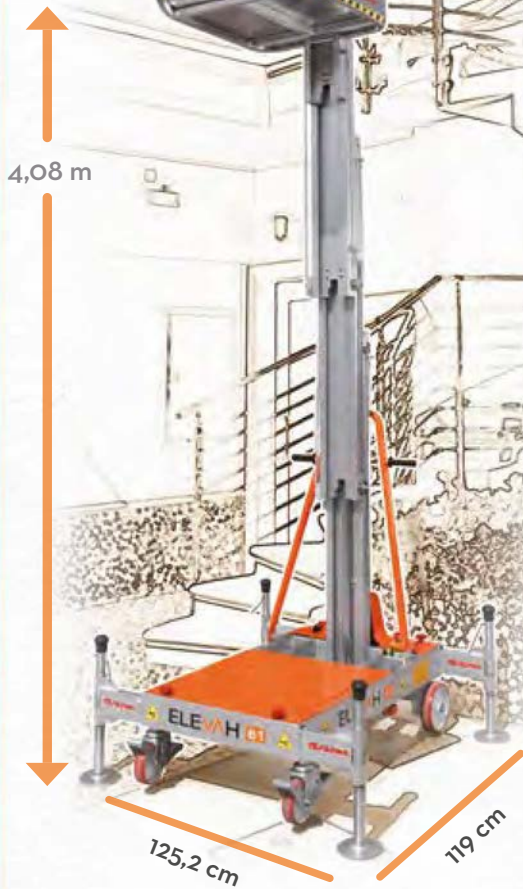

ELEVAH® 61 is a fast, safe and economical alternative to traditional scaffolding.



It can be easily moved (maximum thrust required: 5kg)

It can be used without stabilizers up to a working height of 3.9 m.

Suitable for every situation.

SOME ACCESSORIES AND CUSTOMISATION



AT 10.1: Power Batteries 12V wit Power connection to the Tractor.



➤ **OTHER ACCESSORIES AND CUSTOMISATION**
P. 46



PUSH AROUND MACHINE

TECHNICAL DATA

		Without Stabilizers	With Stabilizers
Max. working height		3,9 m	6,1 m
Max capacity		200 kg	
Numero di persone		1	
Use		internal*	
A	Closed machine height	1730 mm	
B	Minimum platform height	400 mm	
C	Maximum platform height	1895 mm	4085 mm
D/E	Base overall dimensions	1187x770 mm	1297x1252 mm
F/G	Cage dimensions	760x700 mm	
H/I	Max. distance from the wall	0 mm	275x30 mm
J/K	Storage tray	620x230 mm	
Capacity of storage tray		20 kg	
Machine weight		219 kg	237 kg
Drive wheels dimension		Ø 200 x 50	
Swivel wheels dimensions		Ø 150 x 45	
Batteries		2 AGM - 12 V 45 Ah	
Battery charger		110V - 220V	
Max. speed (rising – descending)		0,16 - 0,21 m/s	
Manual force to move it (at the start - in motion)		7 - 3 kg	
L	Maximum pressure for wheel at full load*	1,47 kN	-
	Maximum pressure for stabilizer at full load*	-	1,53 kN
Work cycles** (with fresh batteries)		Ca. 200	

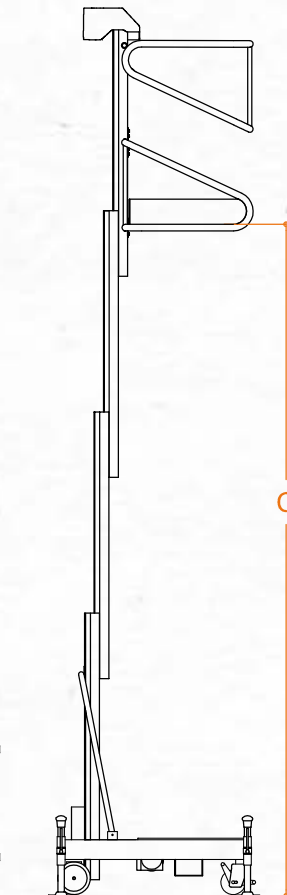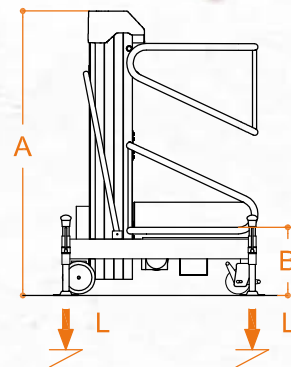

ELEVAH 61

TECHNICAL DATA

*** The EXTERNAL use is possible with OVERSIZED STABILIZERS (Accessory: 61 ST)**

Base overall dimensions with stabilizers: 1722 mm (E) x 1297 (D)

** Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

*** It refers to the version with batteries. By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height.

