

# ELEVAH<sup>®</sup> 50 MOVE picking

NEW

The model Elevah 50 MP is the stock picker that weighs 400 kg and has a capacity of 200 kg. It is equipped with double picking tray.



400 kg



200 kg

COMPLETELY  
ALLUMINIUM



kg.  
60



kg.  
40



It is extremely compact (78 cm X 110 cm) allowing to move easily around very narrow spaces.

## PICKING PLATFORMS

It is equipped with an extendable as well as adjustable in height picking platform with a winch at the operator's station. It is also equipped with a fixed tools platform. The picking platform has a capacity of 60 kg, whereas the tools platform has a maximum capacity of 40 kg.



## COMPLETE CONTROL IN ONE HAND

The single lever joystick allows the operator to have one hand free and carry out other operations at height with ease.

## SOME ACCESSORIES AND CUSTOMISATION



**ZA:** ballast for slippery floors (100 kg).

OTHER ACCESSORIES AND CUSTOMISATION ON P. 46



ELEVAH 50 MOVE PICKING

STOCK PICKERS

## Technical data



<b>Max. working height</b>		5,17 m
<b>Max capacity</b>		200 kg
<b>Number of people</b>		1
<b>Use</b>		Internal - External
<b>A</b>	Closed machine height	1745 mm
<b>B</b>	Minimum platform height	490 mm
<b>C</b>	Maximum platform height	3170 mm
<b>D/E</b>	Base overall dimensions	1000 x 760 mm
<b>F/G</b>	Cage dimensions	750 x 540 mm
<b>Machine weight</b>		400 kg
<b>H/I</b>	Fixed picking tray dimensions	230 x 750 mm
<b>Dimensioni piano fisso</b>		40 kg
<b>Drive wheels dimension</b>		Ø 220 x 65
<b>Swivel wheels dimensions</b>		Ø 200 x 45

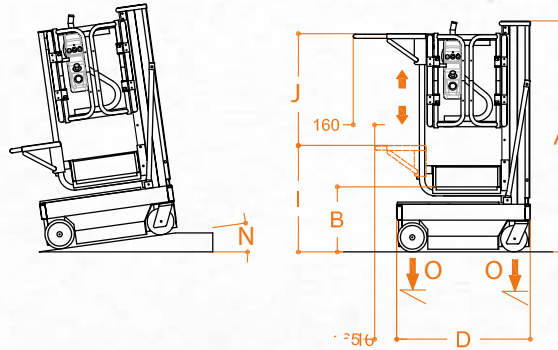


### PICKING PLATFORM

<b>Adjustment</b>		manual
<b>J</b>	Stroke	840 mm
<b>Min. height from the ground</b>		800 mm
<b>Max. height from the ground</b>		4320 mm
<b>K/L/ M</b>	Dimensions	380 (540) x 760 mm
<b>Capacity</b>		60 kg

### PERFORMANCE

<b>Power supply</b>		electrical
<b>Batteries</b>		Lead-Acid Batteries 12V 105 Ah
<b>Battery charger</b>		110V - 220V
<b>N</b>	Pendenza massima superabile	13%
<b>Climbing ability at height</b>		2,5%
<b>Internal turning radius</b>		0
<b>External turning radius</b>		1200 mm
<b>Max. speed (rising - descending)</b>		0,12 - 0,15 m/s
<b>Maximum shifting speed (on the ground - at height)</b>		0,9 - 0,2 m/s
<b>O</b>	Maximum pressure for wheel at full load*	2,1 kN
<b>Work cycles ** (with fresh batteries)</b>		Ca. 140

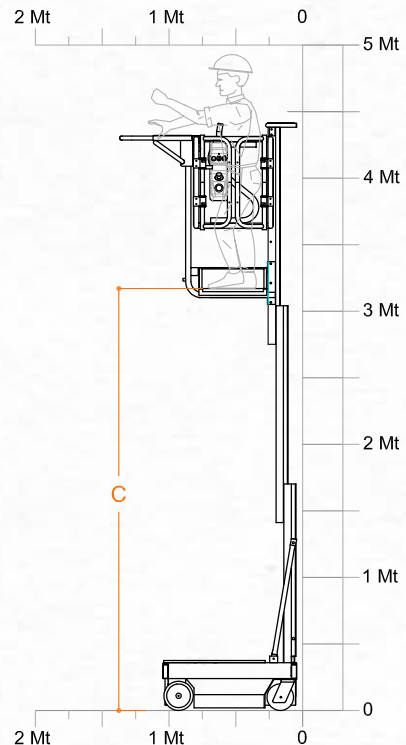

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.