


ELEVAH[®] 80 and 65 MOVE picking

Stock pickers to reach 7,75 m and 6,65 m working height. The right solution for picking activities up to 100 kg capacity. It permits to use the max height of your warehouse as well as optimising the costs. Restrained weight, minimum footprint and an incredible manoeuvrability enable to these equipment to move around easily even in very small spaces.

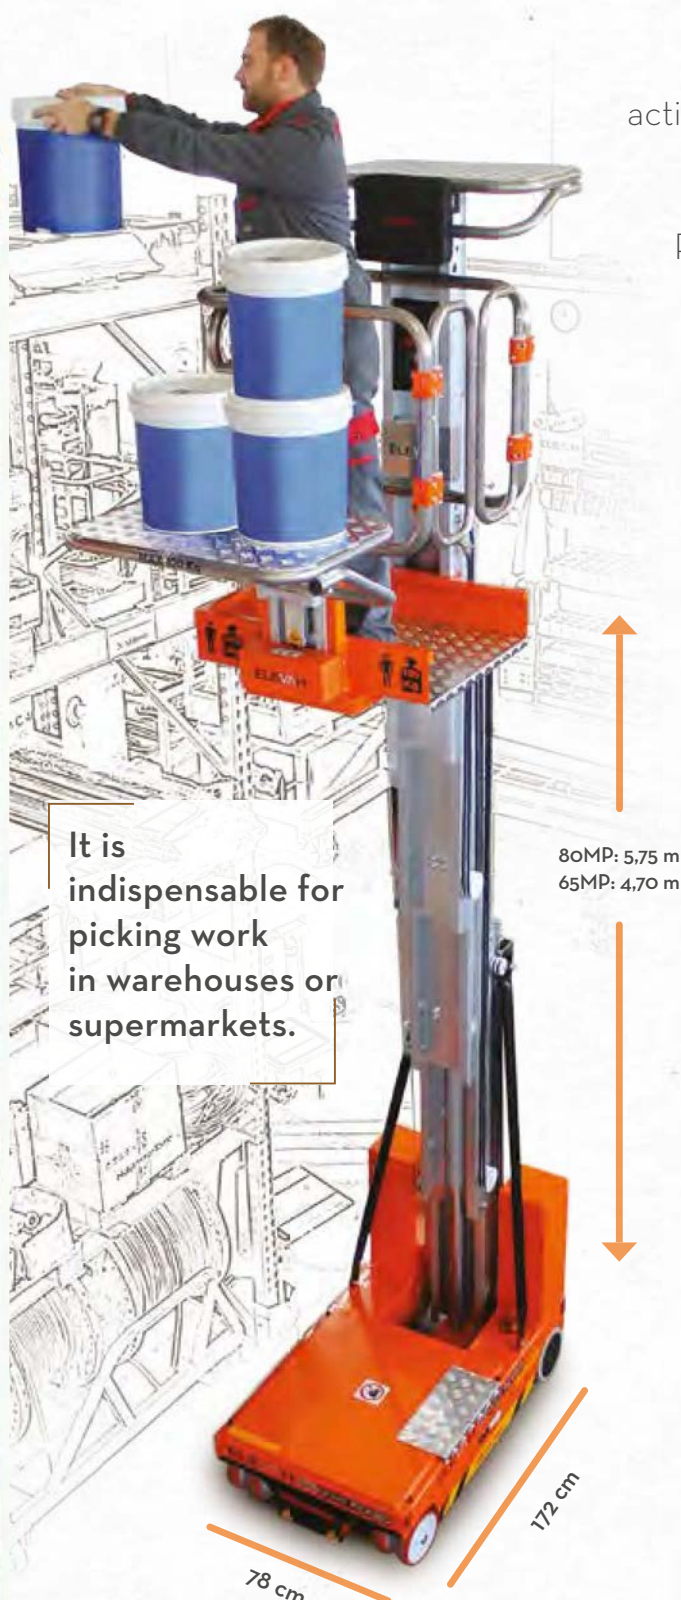


MAXIMUM COMFORT

Thanks to the reach of the electric picking platform and the extremely ergonomic workstation, the picking of products can be done easily and in comfort.

SAFETY FIRST

Side entrance with sensors which stop the cage opening.
Dual operator presence device.
Anti-tilting device.
Electronic slope monitoring.
Overload monitoring.

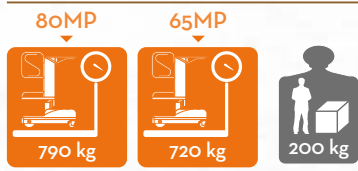

THE COLUMNS AND CAGE
ARE OF ALUMINIUM



SOME ACCESSORIES AND CUSTOMISATION



PICK.PLE: Certification of the machine following
Aerial Platform norms.

➤ OTHER ACCESSORIES AND CUSTOMISATION ON P. 46

They facilitate the operator's work,
while ensuring the highest standards
of safety.



DOUBLE PICKING PLATFORM

In addition to the large electric platform, which is
height adjustable with a maximum payload capacity
of 100 kg, there is a large fixed platform.

BLUE SPOT

Upper protection and signalling beacon.
(See **BLUE SPOT** and **BLUE SPOT1**, p. 54)



NEW


ELEVAH 80 and 65 MOVE PICKING

STOCK PICKERS

ELEVAH® 65 MOVE picking

Technical data

Max. working height		6,50 m
Max capacity		200 kg
Number of people		1
Use		Internal - External
A	Closed machine height	1720 mm
B	Minimum platform height	420 mm
C	Maximum platform height	4700 mm
D/E	Base overall dimensions	1720 x 780 mm
F/G	Cage dimensions	630 x 780 mm
Machine weight		720 kg
H/I	Fixed picking tray dimensions	460 x 760 mm
Fixed picking tray capacity		20 kg
Drive wheels dimension		Ø 220 x 65
Swivel wheels dimensions		Ø 200 x 50

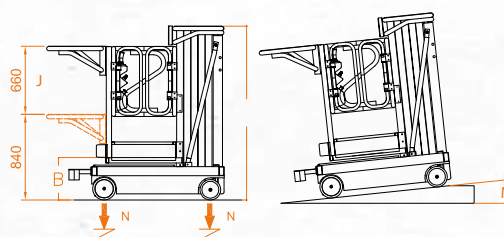

PICKING PLATFORM



Adjustment		electrical
J	Stroke	660 mm
Min. height from the ground		840 mm
Maximum height from the ground		5750 mm
K/L	Dimensions	550 x 760 mm
Capacity		100 kg

PERFORMANCE

Power supply		electrical
Batteries		Lead-Acid Batteries 12V 105 Ah
Battery charger		110V - 220V
M	Maximum climbing ability	15%
Climbing ability at height		2,5%
Internal turning radius		0
External turning radius		1095 mm
Max. speed (rising – descending)		0,2 m/s
Maximum shifting speed (on the ground - at height)		1 - 0,22 m/s
N	Maximum pressure for wheel at full load*	3,20 kN
Work cycles ** (with fresh batteries)		Ca. 130

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

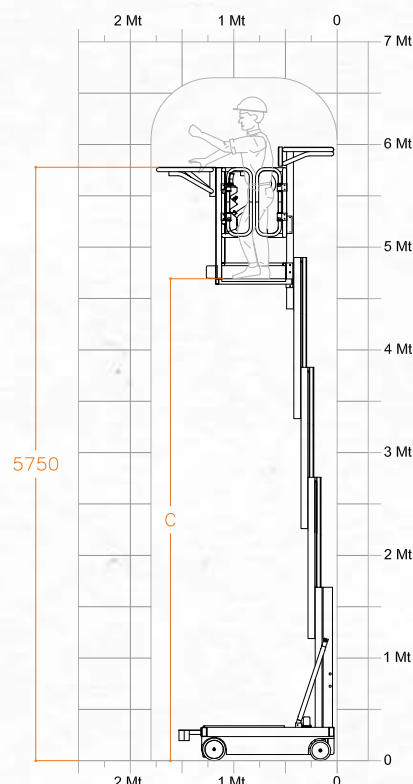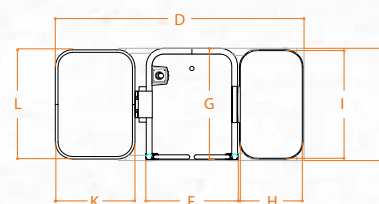

ELEVAH 65 MOVE PICKING

TECHNICAL DATA