


ELEVAH® 65 FL

TECHNICAL DATA

Max. working height		6,50 m
Max capacity		200 kg
Number of people		1
Use		Internal - External
A	Closed machine height	1720 mm
B	Minimum platform height	420 mm
C	Maximum platform height	4700 mm
D/E/F	Base overall dimensions	1280 x 2000 x 780 mm
G/H	Cage dimensions	630 x 780 mm
Machine weight		820 kg
L/K	Fixed picking tray dimensions	500 x 760 mm
Fixed picking tray capacity		20 kg
Drive wheels dimension		Ø 220 x 65
Swivel wheels dimensions		Ø 200 x 50

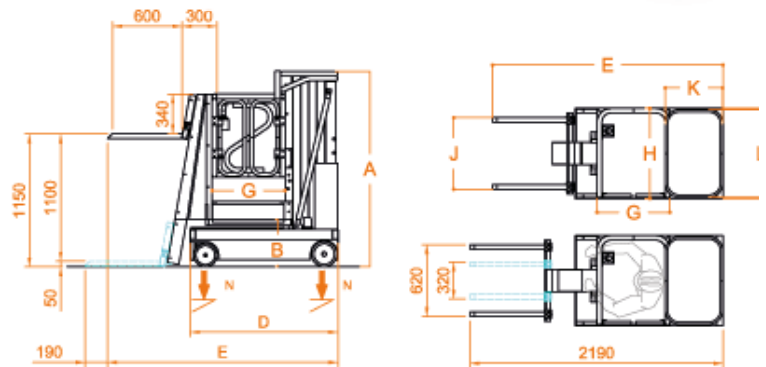


PICKING PLATFORM

Adjustment		electrical
Stroke		1100 mm
Min. height from the ground		50 mm
Maximum height from the ground		5430 mm
I/J	Dimensions	600 x 620 mm
Capacity		100 kg

PERFORMANCE

Power supply		electrical
Batteries		Lead-Acid Batteries 12V 105 Ah
Battery charger		110V - 220V
M	Maximum climbing ability	15%
Climbing ability at height		2,5%
Internal turning radius		0
External turning radius		2100 mm
Max. speed (rising – descending)		0,2 - 0,15 m/s
Maximum shifting speed (on the ground - at height)		1 - 0,22 m/s
N	Maximum pressure for wheel at full load*	3,60 kN
Work cycles ** (with fresh batteries)		Ca. 120

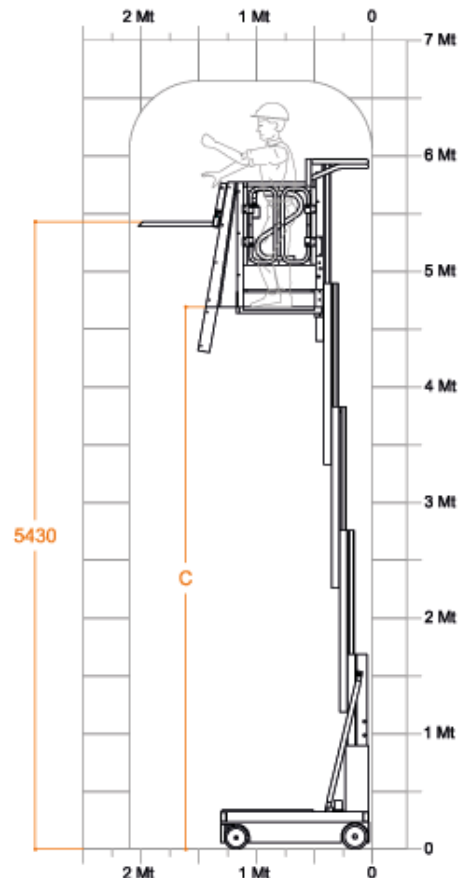

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

ELEVAH® 65 FL

LAVORA
IN SICUREZZA!

