

ELEVAH[®] 80 and 65 MOVE picking

Stock pickers to reach 7,75 m and 6,65 m working height. The right solution for picking activities up to 100 kg capacity. It permits to use the max height of your warehouse as well as optimising the costs. Restrained weight, minimum footprint and an incredible manoeuvrability enable to these equipment to move around easily even in very small spaces.

ELEVAH 80 and 65 MOVE PICKING

It is indispensable for picking work in warehouses or supermarkets.

80MP: 5,75 m
65MP: 4,70 m

78 cm

172 cm




MAXIMUM COMFORT

Thanks to the reach of the electric picking platform and the extremely ergonomic workstation, the picking of products can be done easily and in comfort.

**SAFETY
FIRST**

Side entrance with sensors which stop the cage opening.
Dual operator presence device.
Anti-tilting device.
Electronic slope monitoring.
Overload monitoring.

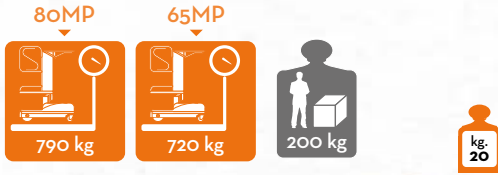

THE COLUMNS AND CAGE ARE OF ALUMINIUM



They facilitate the operator's work, while ensuring the highest standards of safety.



SOME ACCESSORIES AND CUSTOMISATION



PICK.PLE: Certification of the machine following Aerial Platform norms.

➤ **OTHER ACCESSORIES AND CUSTOMISATION ON P. 46**

DOUBLE PICKING PLATFORM

In addition to the large electric platform, which is height adjustable with a maximum payload capacity of 100 kg, there is a large fixed platform.

BLUE SPOT

Upper protection and signalling beacon. (See **BLUE SPOT** and **BLUE SPOT1**, p. 54)




ELEVAH 80 and 65 MOVE PICKING

STOCK PICKERS

ELEVAH[®] 80 MOVE picking

TECHNICAL DATA

| | | |
|------------------------------------|-------------------------------|---------------------|
| Max. working height | | 7,75 m |
| Max capacity | | 200 kg |
| Number of people | | 1 |
| Use | | Internal - External |
| A | Closed machine height | 1980 mm |
| B | Minimum platform height | 590 mm |
| C | Maximum platform height | 5750 mm |
| D/E | Base overall dimensions | 1720 x 780 mm |
| F/G | Cage dimensions | 630 x 780 mm |
| Machine weight | | 790 kg |
| H/I | Fixed picking tray dimensions | 500 x 760 mm |
| Fixed picking tray capacity | | 20 kg |
| Drive wheels dimension | | Ø 220 x 65 |
| Swivel wheels dimensions | | Ø 200 x 50 |



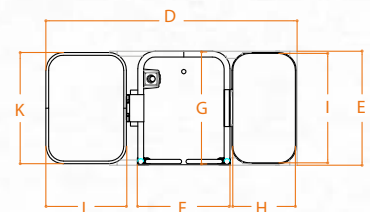


PICKING PLATFORM

| | | |
|---------------------------------------|------------|--------------|
| Adjustment | | electrical |
| J | Stroke | 660 mm |
| Min. height from the ground | | 1030 mm |
| Maximum height from the ground | | 6830 mm |
| K/L | Dimensions | 550 x 760 mm |
| Capacity | | 100 kg |

PERFORMANCE

| | | |
|---|--|--------------------------------|
| Power supply | | electrical |
| Batteries | | Lead-Acid Batteries 12V 105 Ah |
| Battery charger | | 110V - 220V |
| M | Maximum climbing ability | 15% |
| Climbing ability at height | | 2,5% |
| Internal turning radius | | 0 |
| External turning radius | | 1095 mm |
| Max. speed (rising - descending) | | 0,2 m/s |
| Maximum shifting speed (on the ground - at height) | | 1,0 - 0,22 m/s |
| N | Maximum pressure for wheel at full load* | 3,50 kN |
| Work cycles ** (with fresh batteries) | | Ca. 130 |

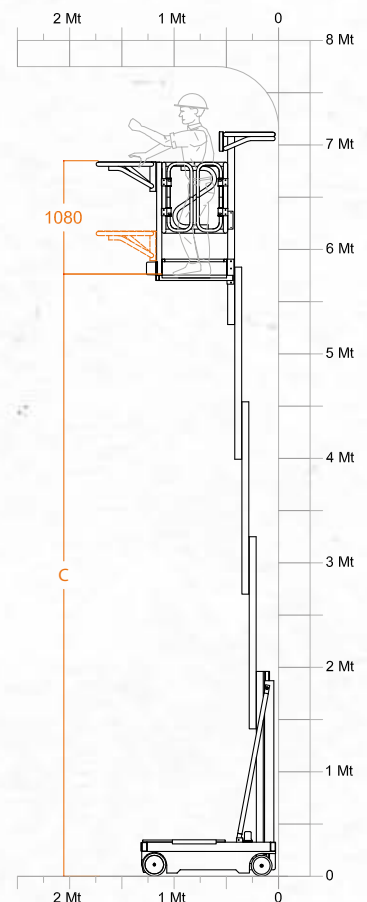

ELEVAH 80 MOVE PICKING

TECHNICAL DATA

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.