

# SAMOHODA ZGLOBNA DISEL PLATFORMA



# HA260 PX



## Optimalna produktivnost

- Kontrola do 4 simutalna pokreta
- Optimalne transportne dimnezije

## Odlična pokretljivost u uskim prostorima

- Uski radius okreta
- Okret kupole u gabaritu

## Pogon za sve vrste terena

- Pogon 4x4x4
- Blokade diferencijala
- Visina od tla 42 cm

**Haulotte**   
GROUP  
More than lifting

[WWW.UPRENT.HR](http://WWW.UPRENT.HR)



# HA260 PX




**Haulotte**  
GROUP

## ZGLOBAN SAMOHODNA DISEL PLATFROMA

### TECHNICAL DATA

Radna visina	25.6 m
Visina platforme	23.6 m
Bočni doseg	16.2 m
Zglob na visini	6.76 m
Nosivost u košari	230 kg
<b>F x G</b> Dimezije košare	1.8 x 0.8 m
<b>A</b> Dužina u mirovanju	12 m
<b>H</b> Dužina za transport	9.5 m
<b>B</b> Širina	2.38 m
<b>C</b> Visina u mirovanju	2.71 m
Rotacija JIB-a	140° (+70/-70)
Rotacija košare	180° (+90/-90)
Rotacija kupole	360 °
Tailswing	0 m
Tailswing riser down	1.76 m
<b>D</b> Međuosovinski razmak	2.8 m
<b>E</b> Visina od tla	42 cm
Limit rada na :	5 °
Brzina vožnje	0.5 - 4.5 km/h
Nagib	40 %
Radius okreta unutarnji	4.15 m
Dimenzijsi kotača	385/65-22.5
Snaga motora	33.2 kW - 45.1 hp
Težina stroja	15 890 kg

### HA260 PX

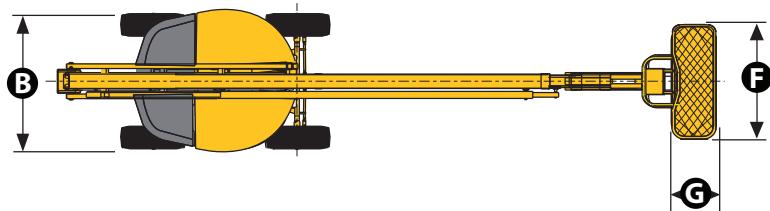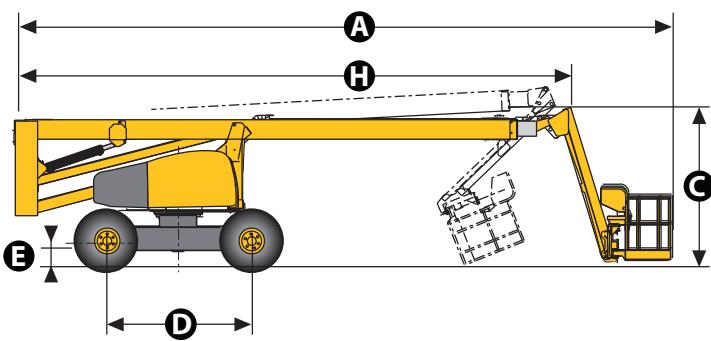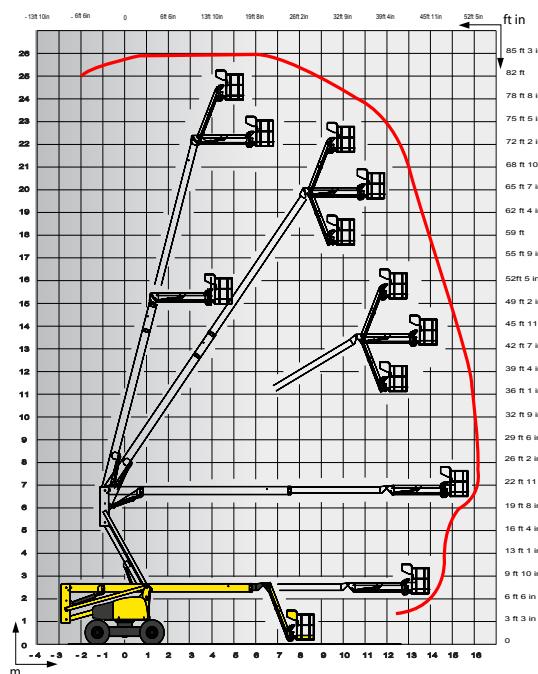

### STANDARD EQUIPMENT

- 4 Wheel drive and steer
- Differential wheel lock increasing rough terrain capacity
- Proportional controls enhancing comfort and safety
- 4 simultaneous movements for highest productivity
- 230 kg (2 persons) load capacity
- Sound and light alarm for tilt and load
- Electric pump system and emergency descent
- 12 V battery / electrical control system
- Safe to use in winds up to 45 km/h – 28 mph
- Low fuel level indicator (upper control box)
- Hourmeter
- Tow hooks

### OPTIONS AND ACCESSORIES

- On-board 3.3 kW generator
- Cold weather kit
- Power to platform (Female plug in the basket 110V/220V)
- Alarm package (motion and travel alarm)
- Travel alarm
- Rotating beacon
- 15W flashing light
- Air line to platform
- 55W platform working light
- Hydraulic oil cooler
- Hydraulic oil in tank and circuit for warm countries
- Biodegradable hydraulic oil
- Upper control box protection cover (transparent plastic and fixed place)
- Automatic Overspeed Air Shutdown Valve (Electric one-way valve, flame arrestor, spark arrestor)
- 30 mA circuit-breaker
- Large platform 2.44 m x 0.8 m with drop bar